

Sapphire LedLite LP



LOW PROFILE LED RECESSED DECORATIVE CIRCULAR LUMINAIRE FOR INTERNAL APPLICATIONS



APPLICATIONS


- > Reception lighting
- > Hotel lighting
- > Corridor lighting
- > Entrance Lobbies
- > Office lighting
- > Hospital lighting

FEATURES

- > Energy efficient with high output LED light source
- > Fixed output or dimmable options
- > Finished with white trim
- > Compatible with remote occupancy and daylight control systems
- > Available with emergency battery back-up



SAPPHIRE LEDLITE LP

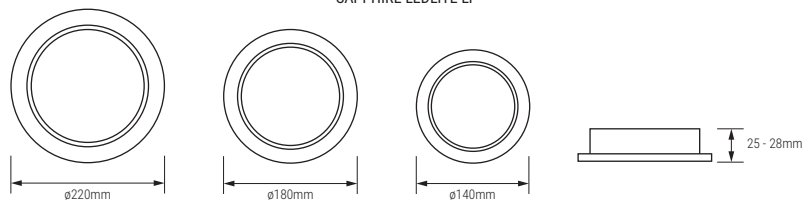

DESCRIPTION

The Sapphire LedLite LP is a low profile 28mm recessed circular LED Downlighter for applications with shallow ceiling voids where flush mounting to a ceiling is preferred for discreet lighting effect. It is based on one style of housing with a range of three models. The LedLite is a single circuit LED PCB providing fixed output or options to dim via 0V to 10V, Dali or Triac Dim drivers. The bezel is finished in white and fitted with a flat opal glass diffuser. All models suitable for Drop Glass options.

The Sapphire LedLite LP incorporates the LedLite LED PCB, providing a lifespan in the region of 100,000 hours.

Sapphire LedLite LP - single circuit LedLite PCB and Driver to enable switching by remote switch or occupancy detector. Available 11 Watt, 18 Watt and 23 Watt with 140mm, 180mm and 230mm diameter bezel respectively.

Sapphire LedLite LP - Dali Dim or 0V to 10V Dim - Single Circuit LedLite LED PCB for dimming operation from the dimmable driver to be operated by remote detector or dimmer switch. Available 11 Watt, 18 Watt and 23 Watt with 140mm, 180mm and 230mm diameter bezel respectively.

Sapphire LedLite LP - Triac Dim - Single Circuit LedLite LED PCB and Driver for remote dimming via a dimmer switch such as VariLight Pro. Check for compatible dimmers. Available 11 Watt, 18 Watt and 23 Watt with 140mm, 180mm and 230mm diameter bezel respectively.



Also available as Surface Mount version
Code: **Sapphire-LedLite-SM**



A **SAPPHIRE** installation in a nursing home

morganhope

TECHNICAL + OPTIONS

MODEL (ORDER CODE)	WATTAGE	LUMEN OUTPUT	COLOUR TEMPERATURE	OVERALL SIZES	CUT-OUT SIZES	OPTION CODE SUFFIX
SAPPHIRE LEDLITE LP	11W	1155 lm	3000 - 6000k	ø 140 mm x 25 mm (H)	ø 125 mm	DG003 - Full Clear Drop Glass with frosted etched centre circle (Not available for 140mm diameter) DG006 - Frosted Drop Glass with etched halo (Not available for 140mm diameter) EM3 - Integral Emergency Pack
	18W	1890 lm		ø 180 mm x 27 mm (H)	ø 160 mm	
	23W	2415 lm		ø 230 mm x 28 mm (H)	ø 210 mm	
SAPPHIRE LEDLITE LP 0V TO 10V	11W	1155 lm	3000 - 6000k	ø 140 mm x 25 mm (H)	ø 125 mm	
	18W	1890 lm		ø 180 mm x 27 mm (H)	ø 160 mm	
	23W	2415 lm		ø 230 mm x 28 mm (H)	ø 210 mm	
SAPPHIRE LEDLITE LP DALI DIM	11W	1155 lm	3000 - 6000k	ø 140 mm x 25 mm (H)	ø 125 mm	
	18W	1890 lm		ø 180 mm x 27 mm (H)	ø 160 mm	
	23W	2415 lm		ø 230 mm x 28 mm (H)	ø 210 mm	
SAPPHIRE LEDLITE LP TRIAC DIM	11W	1155 lm	3000 - 6000k	ø 140 mm x 25 mm (H)	ø 125 mm	
	18W	1890 lm		ø 180 mm x 27 mm (H)	ø 160 mm	
	23W	2415 lm		ø 230 mm x 28 mm (H)	ø 210 mm	